

BIAX (TT5) 1 x 96W, 80W LINEAR HO T5 1 x 80W

Programmed Start (Low Profile, High Case Temperature)

Programmed Start (Series) Universal Voltage 120V-277V, 220-240V, 100V, or 347V, High Frequency Electronic ballast for one (1) Bixax (TT5) 96W, 80W or Linear HO T5 80W GE, Philips, Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, ROHS compliant
EMI FCC Parts 18, Subparts C, Class A
Rating: Type 1 Outdoor, HL
Sound Rating: Class A
Min. Starting Temp : - 30° C
Max. Case Temp: 90° C
End of Lamp Life Protection Circuit

Surge Protection:
Thermal Protection:
Lamp Current Crest Factor: < 1.6
Remote Mounting Distance: 21 ft
Power Factor: 0.99
Input Frequency: 50/60HZ
THD: < 10%

Meets ANSI C62.41
CLASS P

Case Size: Series E3



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

8/05/09

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
1	100V	80	83	0.84	0.90	NLJ180T5-ROHS
1	220-240V	80	81	0.37 0.23	0.90/1.0	NLE180T5-ROHS
1	120V	96/80	100/84	0.84/0.69	0.90/1.0	SU180T5-ROHS
1	277V	96/80	100/84	0.35/0.30	0.90/1.0	"
1	347V	96/80	100/84	0.29/0.24	0.90/1.0	SC180T5-ROHS

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

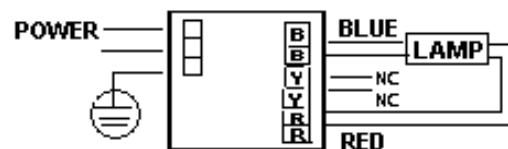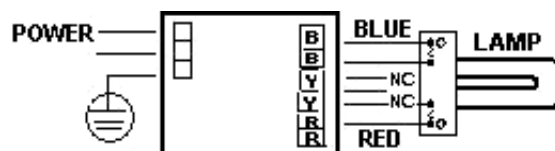

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Case Size: L W H ML
Series E3 325 mm 34mm 29mm 317mm
12.8inch 1.34inch 1.14inch 12.48inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
TEL: 604-904-9533 FAX: 604-904-9634
EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*