



Applies To: 1994-99 Accord - ALL
1992-99 Prelude - ALL
1995-98 Odyssey - ALL


July 27, 1999

Ball Joint Removal and Installation Tools


The special tools required to remove and install lower ball joints on certain Honda vehicles are now available from American Honda through normal parts ordering procedures.

Refer to Service Bulletin 99-039, *Safety Recall: Lower Ball Joints*, for lower ball joint removal and installation instructions.

C-Frame Tool: T/N OTC-7248

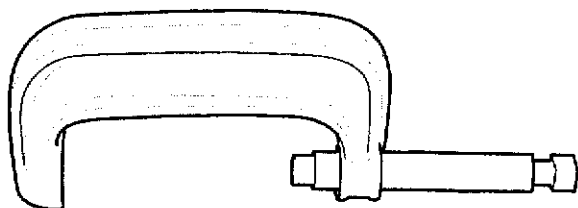

B/J Remover/Installer Adapter (A)
T/N 07XAF-001010A



B/J Base Installer Adapter (B)
T/N 07XAF-001030A



B/J Base Remover Adapter (C)
T/N 07GAF-SD4031A



B/J Base Installer Adapter (E)
T/N 07XAF-001040A



B/J Base Remover Adapter (F)
T/N 07HAF-SF1013A



B/J Pilot Adapter (G)
T/N 07XAF-001050A



B/J Remover/Installer Pilot Adapter (H)
T/N 07XAF-001020A



WARRANTY CLAIM INFORMATION

None. This service bulletin is for information only.

058662