

# LINEAR T8 1 or 2x36W

## Programmed Start (Low Profile)

Programmed Start (Series) Universal Voltage 220V-240V, High Frequency Electronic ballast for one or two 1 or 2) Linear T8 36W GE, Philips, or Osram Fluorescent lamps.

### Technical Specification:

CE Certified  
 EMI FCC Parts 18, Subparts C, Class A  
 Rating: Type 1 Outdoor, HL  
 Sound Rating: Class A  
 Min. Starting Temp : - 30° C  
 Max. Case Temp: 90° C  
 End of Lamp Life Protection Circuit

Surge Protection: Meets ANSI C62.41  
 Thermal Protection: CLASS P  
 Lamp Current Crest Factor: < 1.6  
 Remote Mounting Distance: 21 ft  
 Power Factor: 0.99  
 Input Frequency: 50/60HZ  
 THD: < 10%

### Case Size: Series E1



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

1/07/07

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2 & 1	220V	36	77/40	0.35/0.18	0.95/1.05	NE236T8
2 & 1	230V	36	77/40	0.33/0.17	0.95/1.05	"
2 & 1	240V	36	77/40	0.32/0.16	0.95/1.05	"

#### LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

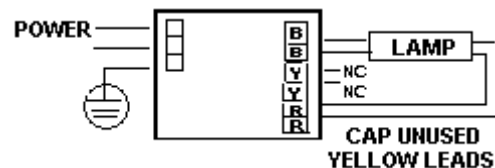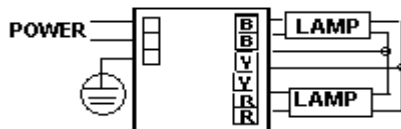

**WARNING: Always Disconnect Power Before Handling.**  
 Case Should be Grounded. Install in Accordance  
 with National and Local Electrical Codes.

Series E1  
 Case Size: L 280mm 11.02inch W 39mm 1.54inch H 28mm 1.1inch ML 265mm 10.43inch

500 Marine Drive, #200 North Vancouver, BC V7P 1T7  
 TEL: 604-904-9533 FAX: 604-904-9634  
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage  
 Lighting Ltd.*