


LED 7 inch to 15 inch Strips Specification

S12DC12W45-10



S12DC12W45-15



S12DC24W45-15




Left

S12DC36W25-7

S12DC36W45-7

S12DC36W45-9

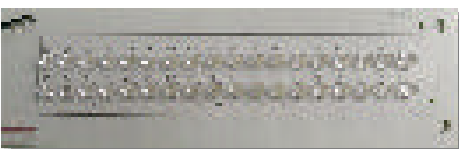

Right

S12DC72W15-7

S12DC72W25-7

S12DC72W45-7

S12DC60W45



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

11/1/05

| # LEDs | Voltage | Description | Dimension mm | | | Input Current | Input Watts | Luminance mcd/LED | View Angle | SAGE Model Number |
|--------------------------|---------|--------------|--------------|-------|--------|---------------|-------------|-------------------|------------|-------------------|
| | | | Length | W/Dia | Height | | | | | |
| 12-15 inch Strips | | | | | | | | | | |
| 60 | 12V DC | White 15" | 381 | 30 | 10 | 170mA | 2.04 | 1500-2500 | 45 deg | S12DC60W45-30 |
| 60 | 12V DC | White 15" | 381 | 20 | 10 | 170mA | 2.04 | 1500-2500 | 45 deg | S12DC60W45-20 |
| 24 | 12V DC | White 12" | 305 | 15 | 10 | 160mA | 1.9 | 1500-2500 | 45 deg | S12DC24W45-15 |
| 12 | 12V DC | White | 305 | 10 | 10 | 80 mA | 1 | 1500-2500 | 45 deg | S12DC12W45-10 |
| 12 | 12V DC | White 12" | 305 | 10 | 10 | 80 mA | 1 | 1500-2500 | 45 deg | S12DC12W45-10 |
| 24 | 12V DC | White 1' SM | 305 | 20 | 16 | 360mA | 4.3 | 2000mlm | 60 deg | S12DC24W60-20 |
| 24 | 12V DC | Red 1' SM | 305 | 20 | 16 | 320mA | 3.8 | 2000mlm | 120 deg | S12DC24R100-20 |
| 24 | 12V DC | Green 1' SM | 305 | 20 | 16 | 360mA | 4.3 | 2000mlm | 120 deg | S12DC24G100-20 |
| 24 | 12V DC | Blue 1' SM | 305 | 20 | 16 | 360mA | 4.3 | 1000mlm | 120 deg | S12DC24B100-20 |
| 24 | 12V DC | Amber 1' SM | 305 | 20 | 16 | 320mA | 3.8 | 2000mlm | 120 deg | S12DC24Y100-20 |
| 24 | 12V DC | White 1' SM | 305 | 10 | 16 | 360mA | 4.3 | 2000mlm | 60 deg | S12DC24W60-10 |
| 24 | 12V DC | Red 1' SM | 305 | 10 | 16 | 320mA | 3.8 | 2000mlm | 120 deg | S12DC24R100-10 |
| 24 | 12V DC | Green 1' SM | 305 | 10 | 16 | 360mA | 4.3 | 2000mlm | 120 deg | S12DC24G100-10 |
| 24 | 12V DC | Blue 1' SM | 305 | 10 | 16 | 360mA | 4.3 | 1000mlm | 120 deg | S12DC24B100-10 |
| 24 | 12V DC | Amber 1' SM | 305 | 10 | 16 | 320mA | 3.8 | 2000mlm | 120 deg | S12DC24Y100-10 |
| 7 inch Strips | | | | | | | | | | |
| 72 | 12V DC | White 4 rows | 170 | 127 | 10 | 420mA | 5 | 1500-2500 | 45 deg | S12DC72W45-7 |
| 72 | 12V DC | White 4 rows | 170 | 127 | 10 | 420mA | 5 | 7000 | 25 deg | S12DC72W25-7 |
| 72 | 12V DC | White 4 rows | 170 | 127 | 10 | 420mA | 5 | 10000-12000 | 15 deg | S12DC72W15-7 |
| 36 | 12V DC | White 2 rows | 170 | 50 | 10 | 216mA | 2.6 | 1500-2500 | 45 deg | S12DC36W45-7 |
| 36 | 12V DC | White 2 rows | 170 | 50 | 10 | 216mA | 2.6 | 7000 | 25 deg | S12DC36W25-7 |
| 36 | 12V DC | White 2 rows | 228 | 50 | 10 | 216mA | 2.6 | 1500-2500 | 45 deg | S12DC36W45-9 |

Maximum operating temperature , Tc <45 ° C

Constant Operating Voltage Required

1 YEAR LIMITED WARRANTY

Manufacturer warrants to the purchaser: LED product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

