

LINEAR T8 1x20W, 18W

LINEAR T8 2x20W, 18W

Programmed Start Series (Low Profile)

Programmed Start (Series) Universal Voltage 100V-240V and 120V-277V High Frequency Electronic ballast for Linear T8 20W, 18W GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor
 Sound Rating: Class A
 Min. Starting Temp : -10° C
 Max. Case Temp: 75° C
 End of Lamp Life Protection Circuit

Surge Protection: Meets ANSI C62.41
 Thermal Protection: CLASS P
 Lamp Current Crest Factor: < 1.6
 Remote Mounting Distance: 10 ft
 Power Factor: 0.99
 Input Frequency: 50/60HZ
 THD: < 10%

Case Size: Series JES



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice 3/07/07

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
1	120	20/18	24/21	0.20/0.18	>0.90	SO-E120T8J4
1	240	20/18	24/21	0.10/0.09	>0.90	"
1	120-277	20/18	24/21	0.09/0.08	>0.90	SU120T8J4

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2	120	20/18	42/39	0.35/0.33	>0.90	SO-E220T8J4
2	240	20/18	42/39	0.18/0.16	>0.90	"
2	120-277	20/18	42/39	0.17/0.15	>0.90	SU220T8J4

5 YEAR LIMITED WARRANTY

Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

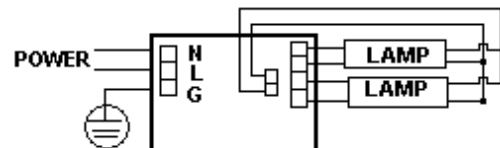

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Case Size	L	W	H	ML
Series JES	365mm	30mm	28mm	355mm
	14.4inch	1.18inch	1.1inch	13.97inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*