

# BIAX (TT5) 1 or 2x24W, 18W

Programmed Start

Programmed Start (Series) Universal Voltage 120V-277V or 347V, High Frequency Electronic ballast for one or two (1 or 2) Bix (TT5) 24W, 18W Philips, GE or Osram Fluorescent lamps.

## Technical Specification:

UL Listed, CUL Certified, ROHS Compliant  
 EMI FCC Parts 18, Subparts C, Class A  
 Rating: Type 1 Outdoor, HL  
 Sound Rating: Class A  
 Min. Starting Temp : - 30° C  
 Max. Case Temp: 90° C  
 End of Lamp Life Protection Circuit

Surge Protection: Meets ANSI C62.41  
 Thermal Protection: CLASS P  
 Lamp Current Crest Factor: < 1.6  
 Remote Mounting Distance: 21 ft  
 Power Factor: 0.99  
 Input Frequency: 50/60HZ  
 THD: < 10%  
 1-lamp < 20%

For Bottom leads Specify "B" at the end of Model #

Case Size: Series C1U



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

9/04/10

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2	120V	24/18	52/37	0.42/0.31	0.90/0.94	NXU224-ROHS
2	277V	24/18	52/37	0.18/0.13	0.90/0.94	"
2	347V	24/18	52/37	0.15/0.11	0.90/0.90	NXC224-ROHS
1	120V	24/18	28/20	0.23/0.17	0.93/0.97	NXU224-ROHS
1	277V	24/18	28/20	0.10/0.07	0.93/0.97	"
1	347V	24/18	28/20	0.08/0.06	0.93/0.94	NXC224-ROHS

### LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

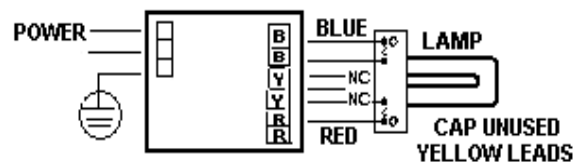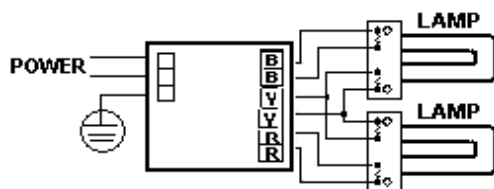

**WARNING: Always Disconnect Power Before Handling.**  
**Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.**

Series C1U L W H ML  
 Case Size: 132mm 62mm 30mm 122mm  
 5.2inch 2.5inch 1.18inch 4.8inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7  
 TEL: 604-904-9533 FAX: 604-904-9634  
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage  
 Lighting Ltd.*