

COMPACT 1 or 2x18W, 13W, 1x26W
BIAX (TT5) 1 or 2x18W, 2x13W
2D 1 or 2x16W, 1x38W, 28W, 21W
LINEAR T5 1 or 2x14W, 1x28W, 21W

Programmed Start New Slim Case Size with leads

Programmed Start (Series) Universal Voltage 120V-277V or 347V High Frequency Electronic ballast for Compact, Biax (TT5), 2D, or Linear T8, T5 GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, ROHS Compliant	Surge Protection:	Meets ANSI C62.41
EMI FCC Parts 18, Subparts C, Class A	Thermal Protection:	CLASS P
Rating: Type 1 Outdoor , HL	Lamp Current Crest Factor:	< 1.6
Sound Rating: Class A	Remote Mounting Distance:	21 ft
Min. Starting Temp : - 30° C	Power Factor:	0.99
Max. Case Temp: 90° C	Input Frequency:	50/60HZ
End of Lamp Life Protection Circuit	THD:	< 10% < 20% for 1 - lamp 347V

For Bottom leads Specify "B" at the end of Model #

Case Size: Series C5U

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

1/11/09


NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2	120V	18/13	39/33	0.33/0.29	0.88/0.91	NAU126-ROHS
2	277V	18/13	39/33	0.15/0.12	0.88/0.91	"
2	347V	18/13	39/33	0.12/0.10	0.88/0.91	NAC126-ROHS
1	120V	28/26/18/13	35/23/20/17	0.29/0.19/0.17/0.14	1.0/0.79/0.92/0.94	NAU126-ROHS
1	277V	28/26/18/13	35/23/20/17	0.14/0.09/0.08/0.07	1.0/0.78/0.92/0.95	"
1	347V	28/26/18/13	35/23/20/17	0.11/0.07/0.06/0.05	1.0/0.78/0.92/0.95	NAC126-ROHS

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

Lead Length

Colour	inch	cm
Black	3.14	8
White	3.14	8
Blue	5.11	13
Red	5.11	13
Yellow	5.11	13

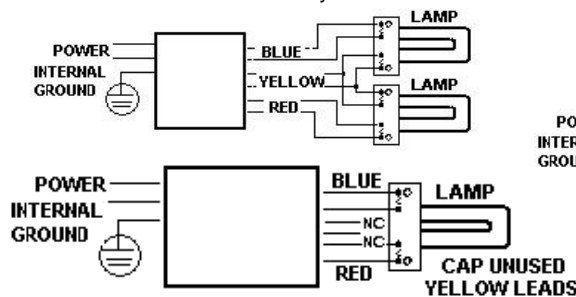

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Series C5U L W H ML
Case Size: 164 mm 47 mm 29 mm 150 mm
6.5inch 1.9inch 1.14inch 5.9inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
TEL: 604-904-9533 FAX: 604-904-9634
EMAIL: sagelighting@shaw.ca www.sagelighting.com

