

COMPACT 1 or 2x32W, 2x26W, 1x42 2D 1 or 2x28W, 21W BIAX (TT5) 1x50W,40W,36W, 2x36W,26W,24W LINEAR T5 2x21W

New Programmed Start Slim Case Size

Programmed Start (Series) Universal Voltage 125VDC or 120V-277V or 347V High Frequency Electronic ballast Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified	Surge Protection:	Meets ANSI C62.41
EMI FCC Parts 18, Subparts C, Class A	Thermal Protection:	CLASS P
Rating: Type 1 Outdoor, HL	Lamp Current Crest Factor:	< 1.6
Sound Rating: Class A	Remote Mounting Distance:	21 ft
Min. Starting Temp : - 30° C	Power Factor:	0.99
Max. Case Temp: 90° C	Input Frequency:	50/60HZ
End of Lamp Life Protection Circuit	THD:	< 10% < 15% for 1 - lamp 347V
For Bottom leads Specify "B" at the end of Model #		

Case Size: Series C5U

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice



NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2	120V	36/32/26/24	62/69/58/54	0.52/0.58/0.48/0.45	0.85/0.88/0.93/0.90	NAU142
2	277V	36/32/26/24	62/69/58/54	0.22/0.25/0.21/0.20	0.85/0.88/0.93/0.90	"
2	347V	36/32/26/24	62/69/58/54	0.18/0.20/0.17/0.16	0.80/0.87/0.93/0.90	NAC142
1	120V	50/42/40/36/32	48/46/43/34/34	0.4/0.39/0.36/0.29	0.81/0.9/1.0/0.85/0.9	NAU142
1	277V	50/42/40/36/32	48/46/43/34/34	0.17/0.17/0.16/0.12	0.81/0.9/1.0/0.85/0.9	"
1	347V	50/42/40/36/32	48/46/43/34/34	0.14/0.13/0.12/0.10	0.80/0.9/1.0/0.85/0.9	NAC142

LIMITED WARRANTY


5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

Lead Length

Colour	inch	cm
Black	4.72	12
White	4.72	12
Blue	6.69	17
Red	6.69	17
Yellow	6.69	17

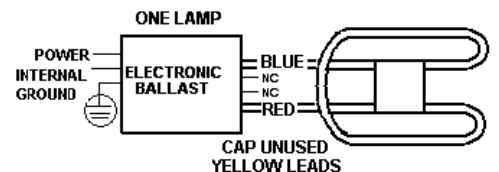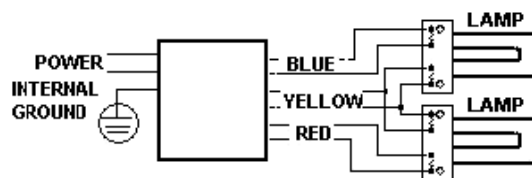

**WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance
with National and Local Electrical Codes.**

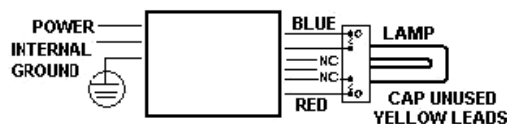

Series C5U L W H ML
Case Size: 164 mm 47 mm 29 mm 150 mm
6.5inch 1.9inch 1.14inch 5.9inch