

COMPACT 1 or 2x70W, 2x57W

Programmed Start

Programmed Start (Series) 120-277V and 90-240V High Frequency Electronic ballast for Compact Fluorescent one or two 70W or two (2) 57W GE lamps.

Technical Specification:

UL Listed, CUL Certified	Surge Protection:	Meets ANSI C62.41
Factory ISO-9002 Certified	Thermal Protection:	CLASS P
EMI FCC Parts 18, Subparts C, Class A Rating:	Type 1 Outdoor, HL	
Sound Rating: Class A	Remote Wiring Distance:	21 ft
Min. Starting Temp : - 30° C	Power Factor:	0.99
Max. Case Temp: 90° C	Input Frequency:	50/60HZ
IR Interference: None	Lamp Current Crest Factor:	< 1.7
End of Lamp Life Protection Circuit		
For Bottom leads Specify "B" at the end of Model #		



Case Size: Series C7U

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice 4/07/09

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	MAX INPUT CURRENT (A)	THD (%)	BALLAST FACTOR	MODEL
2/1	120V	70	147/74	1.2 /0.62	<10	0.92/0.99	NCU270
2/1	277V	70	143/74	0.52/ 0.27	<10/15	0.92/0.99	"
2	120V	57	119	0.93	<10	0.93	"
2	277V	57	119	0.43	<10	0.93	"
2/1	90-240V	70	147/74	1.60/0.82	<10	0.91/0.94	NCJ270

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer..

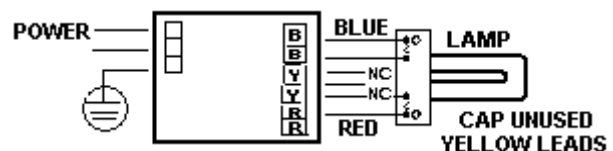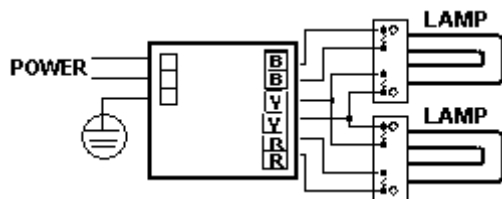

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Series C7U L W H ML
Case Size: 198mm 80mm 36mm 184mm
7.8inch 3.15inch 1.42inch 7.24inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
TEL: 604-904-9533 FAX: 604-904-9634
EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*