

COMPACT 1 or 2x42W, 32W or 2x26W

Programmed Start Slim case with leads

Programmed Start (Series) Universal Voltage 120V-277V or 347V, High Frequency Electronic ballast for one or two (1 or 2) Compact 42W, 32W or two (2) 26W GE, Philips or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, ROHS compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor, HL
 Sound Rating: Class A
 Min. Starting Temp : - 30° C
 Max. Case Temp: 90° C
 End of Lamp Life Protection Circuit

Surge Protection: Meets ANSI C62.41
 Thermal Protection: CLASS P
 Lamp Current Crest Factor: < 1.6
 Remote Mounting Distance: 21 ft
 Power Factor: 0.99
 Input Frequency: 50/60HZ
 THD: 120V < 10% 277V, 347 < 15%
 347V 1-lamp < 20%

For Bottom leads Specify "B" at the end of Model #

Case Size: Series MU



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

1/10/09

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2	120V	42/32/26	84/65/53	0.70/0.55/0.44	0.85/0.88/0.90	NCU242RS-ROHS
2	277V	42/32/26	84/65/53	0.30/0.24/0.19	0.85/0.88/0.92	"
2	347V	42/32/26	84/65/53	0.24/0.19/0.15	0.85/0.88/0.92	NCC242RS-ROHS
1	120V	42/32	43/35	0.36/0.30	0.88/0.90	NCU242RS-ROHS
1	277V	42/32	43/35	0.16/0.13	0.88/0.90	"
1	347V	42/32	43/35	0.12/0.10	0.88/0.90	NCC242RS-ROHS

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

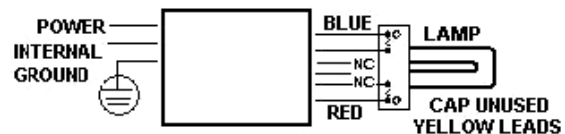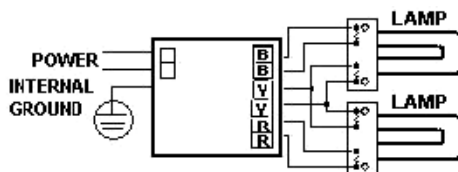

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Series MU, MS L W H ML
 Case Size: 241mm 43.8mm 29.5mm 226mm
 9.5inch 1.72inch 1.16inch 8.9inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
 Lighting Ltd.*