

# LINEAR T8 2x32W 0-10V Dimming

Programmed Start (Slim Low Profile, High Case Temperature) Preliminary Spec

Programmed Start (Series) Universal Voltage 120V-277V High Frequency Electronic Dimming ballast for two (2) Linear T8 32W GE, Philips, Osram Fluorescent lamps.

## Technical Specification:

UL Listed, CUL Certified, ROHS Compliant  
 EMI FCC Parts 18, Subparts C, Class A  
 Rating: Type 1 Outdoor, HL  
 Sound Rating: Class A  
 Min. Starting Temp : - 30° C  
 Max. Case Temp: 90° C  
 End of Lamp Life Protection Circuit

Surge Protection:  
 Thermal Protection:  
 Lamp Current Crest Factor:  
 Remote Mounting Distance:  
 Power Factor:  
 Input Frequency:  
 THD

Meets ANSI C62.41  
 CLASS P  
 < 1.7  
 21 ft  
 0.99  
 50/60HZ  
 < 10%


Case Size: Series E9

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS		INPUT CURRENT		BALLAST FACTOR	MODEL
			MIN	MAX	MIN	MAX (A)		
2	120V	32	16	60	0.13	0.51	0.03/0.88	NU232T8D-ROHS
2	277V	32	16	60	0.06	0.22	0.03/0.88	"

### LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

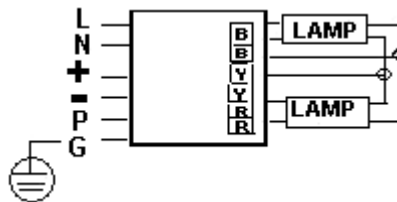

**WARNING: Always Disconnect Power Before Handling.**  
**Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.**

Series E9    L    W    H    ML  
 Case Size: 395mm 38mm 29 mm 387mm  
 15.5inch 1.5inch 1.14inch 15.2inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7  
 TEL: 604-904-9533 FAX: 604-904-9634  
 EMAIL: sagelighting@shaw.ca    www.sagelighting.com

*Sage  
 Lighting Ltd.*