

# LINEAR HO T5 1x39W, 24W

# LINEAR T8 1x32W, 25W, 17W

Programmed Start (Very Low Profile) CE Certified

Programmed Start High Frequency Universal Voltage 100-240V Electronic ballast for Linear Standard 1 (one) T5 HO 39W, 24W or T8 32W, 25W, 17W GE, Philips, or Osram Fluorescent lamps.

## Technical Specification:

UL Listed, CUL Certified, CE Approved  
 CE Certified  
 EMI FCC Parts 18, Subparts C, Class A  
 Sound Rating: Class A  
 Min. Starting Temp : - 10° C  
 Max. Case Temp: 75° C  
 End of Lamp Life Protection Circuit

Surge Protection: Meets ANSI C62.41  
 Thermal Protection: CLASS P  
 Lamp Current Crest Factor: < 1.7  
 Remote Mounting Distance: 10 ft  
 Power Factor: 0.99  
 Input Frequency: 50/60HZ  
 THD: < 10%

**Case Size: Series JEV**



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

3/11/07

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
1	120	39/24	41/28	0.34/0.23	0.96/1.0	SAU139Q2
1	120	32/25/17	33/24/17	0.28/0.20/0.14	1.0	"
1	240	39/24	41/28	0.17/0.12	0.96/1.0	"
1	240	32/25/17	33/24/17	0.14/0.10/0.07	1.0	"

5 YEAR LIMITED WARRANTY 5 YEAR LIMITED WARRANTY

Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

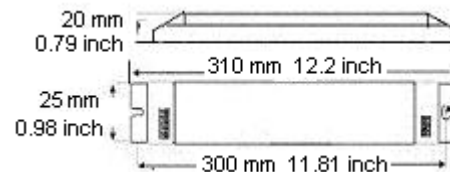

**WARNING: Always Disconnect Power Before Handling.**  
 Case Should be Grounded. Install in Accordance  
 with National and Local Electrical Codes.

Case Size	Voltage	L	W	H	ML
Series JEV	100-240V	310 mm	25mm	20mm	300mm
		12.2inch	0.98inch	0.79inch	11.81inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7  
 TEL: 604-904-9533 FAX: 604-904-9634  
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage  
Lighting Ltd.*