

LINEAR T5 1 or 2x35W, 28W

Programmed Start European Voltage (Low Profile)

Programmed Start (Series) Universal Voltage 220V-240V, High Frequency Electronic ballast for Linear Standard T5 one or two (1 or 2) 35W, 28W GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

CE Approved, ROHS Compliant
 Factory ISO-9002 Certified
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor, HL
 Sound Rating: Class A
 Min. Starting Temp : - 30° C
 Max. Case Temp: 90° C
 End of Lamp Life Protection Circuit

Surge Protection:
 Thermal Protection:
 IR Interference:
 Lamp Current Crest Factor:
 Remote Mounting Distance:
 Power Factor:
 Input Frequency:

Meets ANSI C62.41
 CLASS P
 None
 < 1.6
 21 ft
 0.99
 50/60HZ

Case Size: Series E2



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

3/1/08

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	THD (%)	BALLAST FACTOR	MODEL
2 & 1	220V	35/28	86/42 & 70/35	0.39/0.20 & 0.32/0.16	<10	0.97/1.05	NE235T5-ROHS
2 & 1	240V	35/28	86/42 & 70/35	0.36/0.18 & 0.29/0.15	<10/15	0.95/1.05	"

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

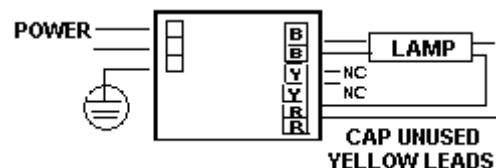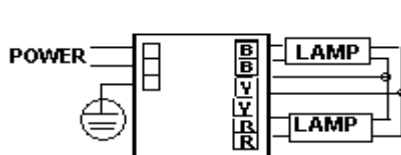

WARNING: Always Disconnect Power Before Handling.
 Case Should be Grounded. Install in Accordance
 with National and Local Electrical Codes.

Case Size: Voltage L W H ML
 Series E2 220-240V 314 mm 34mm 29mm 300 mm
 12.36inch 1.34inch 1.14inch 11.81inch

500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
 Lighting Ltd.*