

LINEAR HO T5 1x54W

Programmed Start (Very Low Profile) CE Certified

Programmed Start High Frequency 120V and 200V-240V Electronic ballast for Linear Standard 1 (one) T5 HO 54W GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, CE Approved
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor
 Sound Rating: Class A
 Min. Starting Temp : - 10° C
 Max. Case Temp: 75° C
 End of Lamp Life Protection Circuit

Surge Protection: Meets ANSI C62.41
 Thermal Protection: CLASS P
 Lamp Current Crest Factor: < 1.7
 Remote Mounting Distance: 10 ft
 Power Factor: 0.99
 Input Frequency: 50/60HZ
 THD: < 10%

Case Size: Series JEV



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

5/11/07

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
1	120	54	59	0.49	1.0	SO154T5Q2
1	200-240	54	59	0.25	1.0	SE154T5Q2

5 YEAR LIMITED WARRANTY

Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

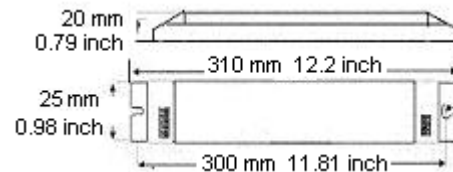

WARNING: Always Disconnect Power Before Handling.
 Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Case Size	Voltage	L	W	H	ML
Series JEV	100-240V	310 mm	25mm	20mm	300mm
		12.2inch	0.98inch	0.79inch	11.81inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*