

LINEAR T5 1 or 2x21W, 14W

Programmed Start (Low Profile)

Programmed Start (Series) Universal Voltage 120V-277V High Frequency Electronic ballast for Linear Standard T5 one or two (1 or 2) 21W, 14W GE, Philips or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor, HL
 Sound Rating: Class A
 Min. Starting Temp: -30° C
 Max. Case Temp: 90° C
 Power Factor: 0.99
 End of Lamp Life Protection Circuit

Surge Protection: Meets ANSI C62.41
 Thermal Protection: CLASS P
 Lamp Current Crest Factor: < 1.6
 Remote Mounting Distance: 21 ft
 Power Factor: 0.99
 Input Frequency: 50/60HZ
 THD: 120V and 277V < 10%
 1-lamp 14W 120V, 2-lamp 277V < 15%
 1-lamp 14W < 40% 1-lamp 21W 277V < 20%



Case Size: Series MU

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2 & 1	120V	21/14	47/24, 33/17	0.40/0.20, 0.28/0.15	0.90/1.0 0.90/1.0	NU221T5RS-ROHS
2 & 1	277V	21/14	47/24, 33/17	0.17/0.09, 0.13/0.07	0.93/1.0 0.93/1.0	"

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

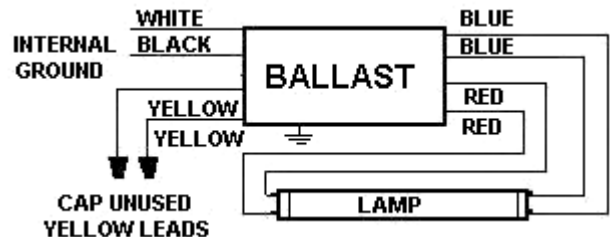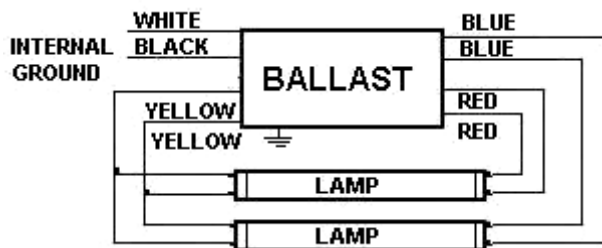

WARNING: Always Disconnect Power Before Handling.
 Case Should be Grounded. Install in Accordance
 with National and Local Electrical Codes.

Series MU, MS L W H ML
 Case Size: 241mm 43.8mm 29.5mm 226mm
 9.5inch 1.72inch 1.16inch 8.9inch

500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
 Lighting Ltd.*