

LINEAR T5 2x35W, 28W, 21W, 14W

Programmed Start (Low Profile) Low Ballast Factor

Low Ballast Factor Programmed Start (Series) Universal Voltage 120V-277V or 347V, High Frequency Electronic ballast for Linear Standard T5 one or two (2) 35W, 28W, 21W, 14W GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

Surge Protection: Meets ANSI C62.41
 Factory ISO-9002 Certified
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor, HL
 Sound Rating: Class A
 Min. Starting Temp : - 30° C
 Max. Case Temp: 90° C
 THD: < 10%
 277V 14W < 20%

End of Lamp Life Protection Circuit
 Thermal Protection: CLASS P
 IR Interference: None
 Lamp Current Crest Factor: < 1.6
 Remote Mounting Distance: 21 ft
 Power Factor: 0.99
 Input Frequency: 50/60HZ


Case Size: Series E7

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2	120V	35/28/21/14	61/49/37/26	0.51/0.41/0.3/0.212	0.75/0.749/0.756/0.76	NU235T5L
2	277V	35/28/21/14	63/51/39/27	0.23/0.18/0.14/0.10	0.787/0.77/0.78/0.78	"
2	347V	35/28/21/14	65/53/41/29	0.189/0.153/0.117/0.08	0.77/0.78/0.80/0.81	NC235T5L

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

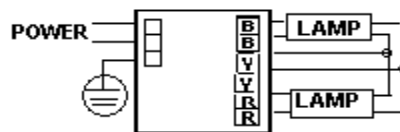

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Series E7 L W H ML
 Case Size: 375mm 30 mm 29 mm 368mm
 14.77inch 1.18inch 1.14inch 14.49inch

500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
 Lighting Ltd.*