

LINEAR T5 1 or 2x35W, 28W

Programmed Start (Low Profile) Low Ballast Factor

Low Ballast Factor Programmed Start (Series) Universal Voltage 120V-277V or 347V, High Frequency Electronic ballast for Linear Standard T5 one or two (1 or 2) 35W, 28W GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified
 Factory ISO-9002 Certified
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor, HL
 Sound Rating: Class A
 Min. Starting Temp : - 30° C
 Max. Case Temp: 90° C
 End of Lamp Life Protection Circuit

Surge Protection:
 Thermal Protection:
 IR Interference:
 Lamp Current Crest Factor:
 Remote Mounting Distance:
 Power Factor:
 Input Frequency:

Meets ANSI C62.41
 CLASS P
 None
 < 1.6
 21 ft
 0.99
 50/60HZ

Case Size: Series E5, E3



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

1/01/09

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	THD	BALLAST FACTOR	MODEL
2 & 1	120V	35/28	66/55 & 34/29	0.55/0.46 & 0.28/0.24	< 10%	0.72 & 0.77	NU235T5LE5
2 & 1	277V	35/28	66/55 & 34/29	0.24/0.20 & 0.12/0.10	< 10%	0.72 & 0.77	"
2 & 1	347V	35/28	66/55 & 34/29	0.19/0.16 & 0.10/0.08	< 10%	0.72 & 0.77	NC235T5LE3

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

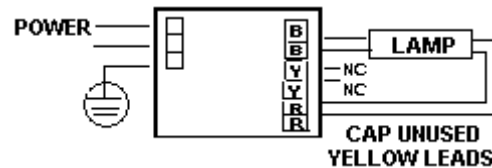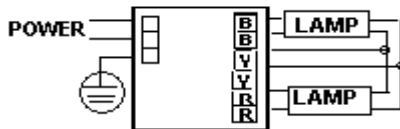

WARNING: Always Disconnect Power Before Handling.
 Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

		L	W	H	ML
Series E5	120-277V	290 mm	34mm	29mm	282 mm
		11.4inch	1.34inch	1.14inch	11.1inch
Series E3	347V	325 mm	34mm	29mm	317mm
		12.8inch	1.34inch	1.14inch	12.48inch