

LINEAR HO T8 1 or 2x44W

Programmed Start

Programmed Start (Series) Universal Voltage 120V-277V or 347V High Frequency Electronic ballast for one or two (1 or 2) 44W Linear HO T8 GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor
 Sound Rating: Class A
 Min. Starting Temp : - 30° C
 Max. Case Temp: 90° C
 THD: < 10%
 End of Lamp Life Protection Circuit

Surge Protection: Meets ANSI C62.41
 Thermal Protection: CLASS P
 Lamp Current Crest Factor: < 1.6
 Remote Mounting Distance: 21 ft
 Power Factor: 0.99
 Input Frequency: 50/60HZ

Case Size: Series MU

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice 4/10/09



NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	AVERAGE INPUT WATTS	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2/1	120V	44	93/50	0.77/0.41	0.90/1.02	NLU244T8HRS-ROHS
2/1	277V	44	93/50	0.34/0.18	0.90/1.02	"
2/1	347V	44	93/50	0.27/0.14	0.90/1.02	NLC244T8HRS-ROHS

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

Lead Length

Colour	inch	cm
Black	18.8	48
White	18.8	48
Blue	30.9	78.5
Red	30.9	78.5
Yellow	46.4	118

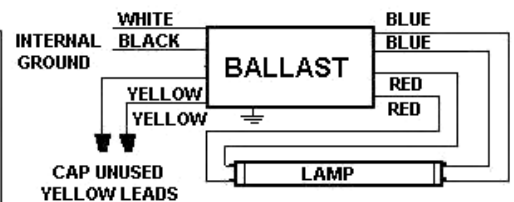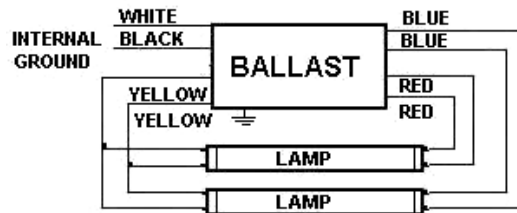

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Series MS Case Size: L 241mm 9.5inch W 43.8mm 1.72inch H 29.5mm 1.16inch ML 226mm 8.9inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

Sage Lighting Ltd.