

LINEAR HO T8 1 or 2x86W, 2x70W, 65W

Programmed Rapid Start

Programmed Rapid Start (Series) Universal Voltage 120V-277V or 347V High Frequency Electronic ballast for one or two (1 or 2) 86W (F96T8 HO), two (2) 70W, 65W Linear HO T8 GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor HL
 Sound Rating: Class A
 Min. Starting Temp : -10° C
 Max. Case Temp: 75° C
 THD: < 10%

Surge Protection:
 Thermal Protection:
 Lamp Current Crest Factor:
 Remote Mounting Distance:
 Power Factor:
 Input Frequency:

Meets ANSI C62.41
 CLASS P
 < 1.6
 21 ft
 0.99
 50/60HZ

Case Size Series FS2

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

4/10/09


NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	AVERAGE INPUT WATTS	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2 /1	120V	86	187/110	1.56/0.92	1.0/1.12	SLU286T8PRS-ROHS
2/1	230V	86	187/110	0.81/0.48	1.0/1.12	“
2/1	277V	86	187/110	0.67/0.40	1.0/1.12	“
2/1	347V	86	187/110	0.51/0.30	1.0/1.12	NLC286T8PRS-ROHS

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

Lead Length

Colour	inch	cm
Black	18.8	48
White	18.8	48
Blue	30.9	78.5
Red	30.9	78.5
Yellow	46.4	118

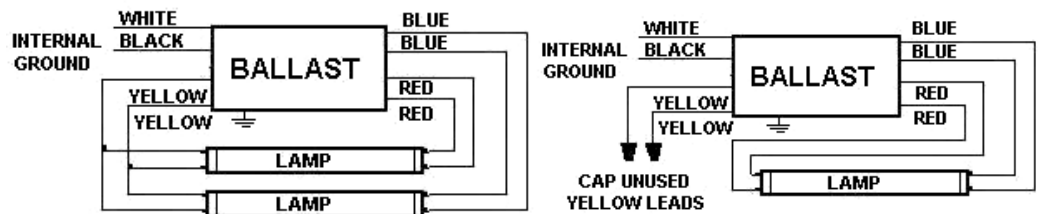

WARNING: Always Disconnect Power Before Handling.
 Case Should be Grounded. Install in Accordance
 with National and Local Electrical Codes.

Series FS2
 Case Size: L 241mm 9.5inch W 59mm 2.3inch H 37mm 1.46inch ML 226mm 8.9inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
 Lighting Ltd.*