

LINEAR T8 1 x 16W, 15W

Programmed Start

Programmed Start (Series) Universal Voltage 120V-277V High Frequency Electronic ballast for one (1) Linear T8 16W, 15W GE, Philips or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, CE, ROHS compliant
 Factory ISO-9001 Certified
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor, HL
 Min. Starting Temp : - 30° C
 Max. Case Temp: 90° C
 IR Interference: None
 End of Lamp Life Protection Circuit

Surge Protection:
 Thermal Protection:
 Sound Rating:
 Remote Mounting Distance:
 Power Factor:
 Input Frequency:
 Lamp Current Crest Factor:
 THD:

Meets ANSI C62.41
 CLASS P
 Class A
 20 ft
 0.99
 50/60HZ
 < 1.6
 < 10%

Case Size: Series MU

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

3/10/09


NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
1	120V	16/15	23/18	0.19/0.15	0.95/1.05	NLU116T8RS-ROHS
1	230V	16/15	23/18	0.10/0.08	0.95/1.05	"
1	277V	16/15	23/18	0.09/0.07	0.95/1.05	"

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

Lead Length

Colour	inch	cm
Black	18.8	48
White	18.8	48
Blue	30.9	78.5
Red	30.9	78.5

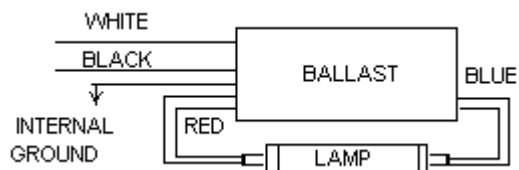

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Series MU, MS L W H ML
 Case Size: 241mm 43.8mm 29.5mm 226mm
 9.5inch 1.72inch 1.16inch 8.9inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
 Lighting Ltd.*