

LINEAR T8 1 or 2x40W, 36W, 32W, 25W BIAX (TT5) 1 or 2x40W

Programmed Start High BF 1.20 for 32W T8

Programmed Start (series) Universal Voltage 120V-277V or 347V, High Frequency Electronic ballast for one or two Linear T8 40W, 36W, 32W, 25W or BiAx (TT5) 40W GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, ROHS Compliant
EMI FCC Parts 18, Subparts C, Class A
Rating: Type 1 Outdoor , HL
Sound Rating: Class A
Min. Starting Temp : - 30° C for 120-277V,
- 10° C for 347V
Max. Case Temp: 90° C
End of Lamp Life Protection Circuit

Surge Protection: Meets ANSI C62.41
Thermal Protection: CLASS P
Lamp Current Crest Factor: < 1.7
Remote Mounting Distance: 21 ft
Power Factor: 0.99
Input Frequency: 50/60HZ
THD: 120V < 10%
1-lamp 25W, 32W, 40W 277V, 347V < 15%

Case Size: Series MU, MS

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

6/10/09



NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2	120V	40/36/32/25	91/68/75/57	0.76/0.57/0.62/0.48	0.91/0.89/1.20/0.92	NU240T8RS-ROHS
2	277V	40/36/32/25	93/69/76/58	0.34/0.25/0.28/0.21	0.94/0.92/1.30/0.95	"
2	347V	40/36/32/25	95/68/75/57	0.27/0.20/0.22/0.16	0.90/0.89/1.20/0.92	NC240T8RS-ROHS
1	120V	40/36/32/25	51/36/41/32	0.43/0.30/0.34/0.26	1.00/0.95/1.40/1.17	NU240T8RS-ROHS
1	277V	40/36/32/25	53/36/42/32	0.19/0.14/0.16/0.11	1.00/1.00/1.45/1.17	"
1	347V	40/36/32/25	50/36/41/32	0.15/0.10/0.12/0.10	0.95/0.95/1.45/1.17	NC240T8RS-ROHS
2/1	120V	40 BIAx TT5	78/41	0.65/0.34	0.91/1.02	NU240T8RS-ROHS
2/1	277V	40 BIAx TT5	78/41	0.28/0.15	0.91/1.02	"
2/1	347V	40 BIAx TT5	82/43	0.24/0.13	0.98/1.06	NC240T8RS-ROHS

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

Lead Length

Colour	inch	cm
Black	18.8	48
White	18.8	48
Blue	30.9	78.5
Red	30.9	78.5
Yellow	46.4	118

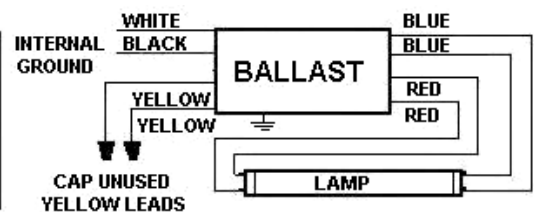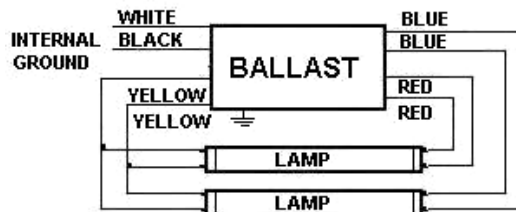

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance
with National and Local Electrical Codes.

Series MU, MS

Case Size:

L	W	H	ML
241mm	43.8mm	29.5mm	226mm
9.5inch	1.72inch	1.16inch	8.9inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
TEL: 604-904-9533 FAX: 604-904-9634
EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*