

# LINEAR T8 1 or 2 x 25W, 17W

Programmed Start (Low Profile)

Programmed Start (Series) Universal Voltage 120V-277V or 347V, High Frequency Electronic ballast for one or two (1 or 2) Linear T8 25W, 17W GE, Philips or Osram Fluorescent lamps.

## Technical Specification:

UL Listed, CUL Certified, ROHS Compliant  
 EMI FCC Parts 18, Subparts C, Class A  
 Rating: Type 1 Outdoor, HL  
 Sound Rating: Class A  
 Min. Starting Temp : - 30° C  
 Max. Case Temp: 90° C  
 End of Lamp Life Protection Circuit

Surge Protection:  
 Thermal Protection:  
 Lamp Current Crest Factor:  
 Remote Mounting Distance:  
 Power Factor:  
 Input Frequency:

Meets ANSI C62.41  
 CLASS P  
 < 1.7  
 21 ft  
 0.99  
 50/60HZ

Case Size: Series E5



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

1/01/10

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	THD %	BALLAST FACTOR	MODEL
2 or 1	120V	25/17	54/38 30/23	0.45/0.32 0.32/0.20	<10/<20	0.90~1.08	NU225T8-ROHS
2 or 1	230V	25/17	54/38 30/23	0.23/0.17 0.15/0.11	<15/<20	0.90~1.10	NU225T8-ROHS
2 or 1	277V	25/17	54/38 30/23	0.20/0.14 0.13/0.09	<15/<20	0.90~1.25	"
2 or 1	347V	25/17	54/38 30/23	0.16/0.10 0.09/0.07	<15/<20	0.90~1.25	NC225T8-ROHS

### LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

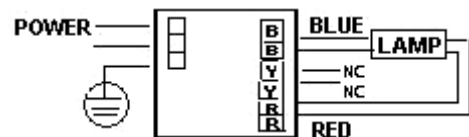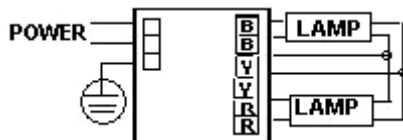

**WARNING: Always Disconnect Power Before Handling.**  
 Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Case Size: L W H ML  
 Series E5 290 mm 34 mm 29 mm 282 mm  
 11.4inch 1.34inch 1.14inch 11.1inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7  
 TEL: 604-904-9533 FAX: 604-904-9634  
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage  
 Lighting Ltd.*