

LINEAR T8 1 or 2x36W

Programmed Start

Programmed Start (series) Universal Voltage 120V-277V High Frequency Electronic ballast for one or two Linear T8 36W GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, CE and ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor , HL
 Sound Rating: Class A
 Min. Starting Temp : - 30° C for 120-277V,
 Max. Case Temp: 90° C
 End of Lamp Life Protection Circuit

Surge Protection: Meets ANSI C62.41
 Thermal Protection: CLASS P
 Lamp Current Crest Factor: < 1.6
 Remote Mounting Distance: 21 ft
 Power Factor: 0.99
 Input Frequency: 50/60HZ
 THD: 120V < 10%
 1-lamp 277V, 230V < 15%

Case Size: Series MU, MS

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

1/10/09



NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2 or 1	120V	36	77/40	0.57/0.37	0.96/1.00	NU236T8RS-ROHS
2 or 1	277V	36	77/40	0.28/0.16	0.96/1.00	“
2 or 1	230V	36	77/40	0.33/0.19	0.96/1.00	“

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

Lead Length

Colour	inch	cm
Black	18.8	48
White	18.8	48
Blue	30.9	78.5
Red	30.9	78.5
Yellow	46.4	118

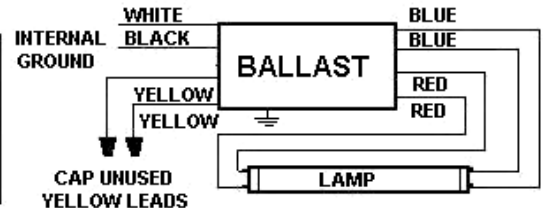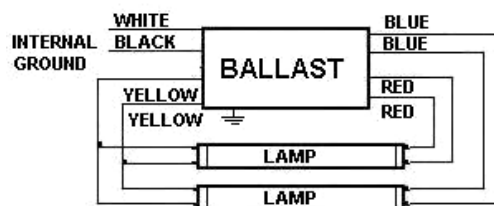

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Series MU, MS
 Case Size: L 241mm 9.5inch W 43.8mm 1.72inch H 29.5mm 1.16inch ML 226mm 8.9inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
 Lighting Ltd.*