

LINEAR T8 1x40W, 32W 2x40W, 32W, 25W

Programmed Start (Low Profile)

Programmed Start (Series) Universal Voltage 120-277V or 347V High Frequency Electronic ballast for one or two (1 or 2) 40W, 32W or two (2) 25W GE, Philips or Osram Linear T8 Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified
EMI FCC Parts 18, Subparts C, Class A
Rating: Type 1 Outdoor, HL
Sound Rating: Class A
Min. Starting Temp: -30° C
Max. Case Temp: 90° C
End of Lamp Life Protection Circuit

Surge Protection: Meets ANSI C62.41
Thermal Protection: CLASS P
Lamp Current Crest Factor: < 1.6
Remote Mounting Distance: 21 ft
Power Factor: 0.99
Input Frequency: 50/60HZ
THD: < 10%

Case Size: Series E3, E5



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

4/01/09

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2	120V	40/32/25	90/70/54	0.75/0.58/0.45	1.0	NU240T8
2	277V	40/32/25	90/70/54	0.32/0.25/0.19	1.0	"
2	347V	40/32/25	90/70/54	0.26/0.20/0.16	1.0	NC240T8
1	120V	40/32	47/38	0.39/0.32	1.07	NU240T8
1	277V	40/32	47/38	0.17/0.14	1.07	"
1	347V	40/32	47/38	0.14/0.11	1.07	NC240T8

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

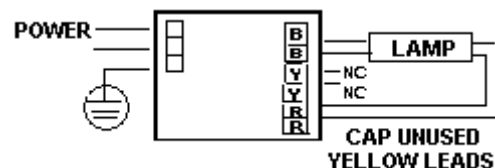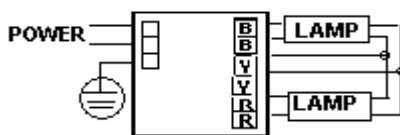

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

		L	W	H	ML
Series E5	120-277V	290 mm	34mm	29mm	282 mm
		11.4inch	1.34inch	1.14inch	11.1inch
Series E3	347V	325 mm	34mm	29mm	317mm
		12.8inch	1.34inch	1.14inch	12.48inch

500 Marine Drive, #200 North Vancouver, BC V7P 1T7
TEL: 604-904-9533 FAX: 604-904-9634
EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*