

# LINEAR T8 1 or 2x59W

## Programmed Instant Start

Programmed Instant Start (parallel) Universal Voltage 120V-277V or 347V High Frequency Electronic ballast for Linear F96T8 Fluorescent one or two (1 or 2) 59W GE, Philips, or Osram lamps.

### Technical Specification:

UL Listed, CUL Certified  
 EMI FCC Parts 18, Subparts C, Class A  
 Rating: Type 1 Outdoor  
 Sound Rating: Class A  
 Min. Starting Temp : 0° C  
 Max. Case Temp: 75° C  
 THD: < 10%

Surge Protection:  
 Thermal Protection:  
 Lamp Current Crest Factor: < 1.6  
 Remote Mounting Distance: 21 ft  
 Power Factor: 0.99  
 Input Frequency: 50/60HZ

Meets ANSI C62.41  
 CLASS P

Case Size: Series MU

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

9/11/09



NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2 or 1	120V	59	107/65	0.89/0.55	0.90/1.05	SLU259T8IS-ROHS
2 or 1	230V	59	107/65	0.47/0.29	0.90/1.05	"
2 or 1	277V	59	107/65	0.39/0.25	0.90/1.05	"
2 or 1	347V	59	107/65	0.32/0.19	0.90/1.05	SLC259T8IS-ROHS

#### 5 YEAR LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

#### Lead Length

Colour	inch	cm
Black	18.8	48
White	18.8	48
Blue	30.9	78.5
Red	46.4	118

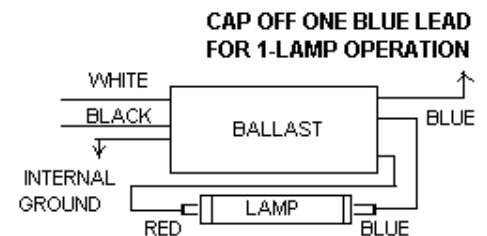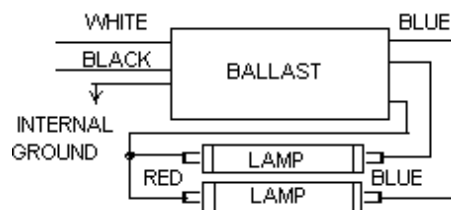

**WARNING: Always Disconnect Power Before Handling.**  
**Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.**

Series MU, MS L W H ML  
 Case Size: 241mm 43.8mm 29.5mm 226mm  
 9.5inch 1.72inch 1.16inch 8.9inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7  
 TEL: 604-904-9533 FAX: 604-904-9634  
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage  
 Lighting Ltd.*