

DC 12V (CE & ROHS Compliant)

LINEAR T8 1x40W, 32W, 25W

LINEAR T12 1x40W, 32W, 20W

CIRCLINE T9 1x40W, 32W, 22W

Rapid Start

Rapid Start Series DC 12V Electronic ballast for one (1) T8 40W, 32W, 25W Circline T9 40W, 32W, 22W or T12 40W, 32W, 20W GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, CE & ROHS Compliant
 Rating: Type 1 Outdoor, HL
 Thermal Protection: CLASS P
 Min. Starting Temp : 0° C
 Max. Case Temp: 75° C

Surge Protection: Meets ANSI C62.41
 Lamp Current Crest Factor: < 1.7
 Remote Mounting Distance: 10 ft
 Sound Rating: Class A

Case Size: Series DC

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

5/11/09



NO. OF LAMPS	INPUT VOLTAGE (DC)	LAMP WATTS	INPUT WATTS	MAX INPUT CURRENT (DCA)	MODEL
1	12	40 T8	39	3.25	SA12DC140RS-ROHS
1	12	40 T12	38	3.16	“
1	12	40 T9 CL	41	3.35	“

5 YEAR LIMITED WARRANTY

Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

Lead Length

Colour	inch	cm
Black	14	36
White	14	36
Blue	14	36
Red	14	36

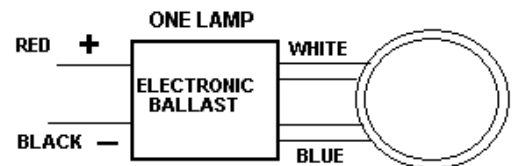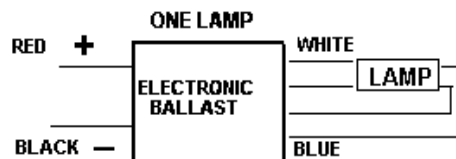

WARNING: Always Disconnect Power Before Handling.
 Case Should be Grounded. Install in Accordance
 with National and Local Electrical Codes.

Series DC	L	W	H	ML
Case Size:	147mm	47mm	34mm	133mm
	5.7inch	1.8inch	1.3inch	5.2inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*