

DC 24V (CE & ROHS Compliant)

LINEAR T8 **1x40W, 32W, 25W**

LINEAR T12 **1x40W, 32W, 20W**

CIRCLINE T9 **1x40W, 32W, 22W**

Rapid Start

Rapid Start Series DC 24V Electronic ballast for one (1) T8 40W, 32W, 25W, Circline T9 40W, 32W, 22W, or T12 40W, 32W, 20W GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, CE & ROHS Compliant

Rating: Type 1 Outdoor, HL

Min. Starting Temp : 0° C

Max. Case Temp: 75° C

Sound Rating: Class A

Surge Protection: Meets ANSI C62.41

Lamp Current Crest Factor: < 1.7

Thermal Protection: CLASS P

Remote Mounting Distance: 10 ft

Case Size: Series DC

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

9/11/09



NO. OF LAMPS	INPUT VOLTAGE (DC)	LAMP WATTS	INPUT WATTS	MAX INPUT CURRENT (DCA)	MODEL
1	24	40/32 T8	39/34	1.63/1.44	SA24DC140RS-ROHSM
1	24	40 T12	38	1.60	"
1	24	40 T9 CL	41	1.70	"

5 YEAR LIMITED WARRANTY

Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of Manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

Lead Length

Colour	inch	cm
Black	14	36
White	14	36
Blue	14	36
Red	14	36

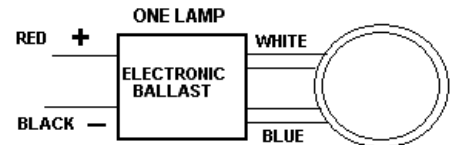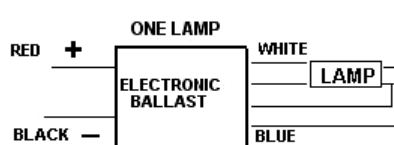

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance
with National and Local Electrical Codes.

Series DC	L	W	H	ML
Case Size:	147mm	47mm	34mm	133mm
	5.7inch	1.8inch	1.3inch	5.2inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*