

# BIAX (TT5) 2,3x40W, 39W, 36W

Programmed Instant Start (Parallel)

Programmed Instant Start (parallel) Electronic High Frequency ballast for three or two (3 or 2) Biax (TT5) 40W, 39W, 36W GE, Philips or Osram Fluorescent lamps.

## Technical Specification:

UL Listed, CUL Certified, ROHS compliant  
 EMI FCC Parts 18, Subparts C, Class A  
 Rating: Type 1 Outdoor  
 Sound Rating: Class A  
 Min. Starting Temp : -18° C  
 Max. Case Temp: 75° C  
 End of Lamp Life Protection Circuit

Surge Protection:  
 Thermal Protection:  
 Lamp Current Crest Factor: < 1.6  
 Remote Mounting Distance: 18 AWG 21 ft  
 Power Factor: 0.99  
 Input Frequency: 50/60HZ  
 THD: < 10%

Meets ANSI C62.41  
 CLASS P

For Bottom leads Specify "B" at the end of Model #

Case Size: Series MU



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	AVERAGE INPUT WATTS	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
3	120V	40/39/36	104/86/80	0.87/0.71/0.67	0.90/0.65/0.75	SXU340PIS-ROHS
2	120V	40/39/36	76/64/60	0.63/0.53/0.50	0.96/0.70/0.85	"
3	277V	40/39/36	104/86/80	0.38/0.31/0.29	0.92/0.75/0.80	"
2	277V	40/39/36	76/64/60	0.28/0.23/0.22	1.00/0.75/0.85	"
3	347V	40/39/36	104/86/80	0.30/0.25/0.23	0.90/0.65/0.75	SXC340PIS-ROHS
2	347V	40/39/36	76/64/60	0.22/0.18/0.17	0.96/0.70/0.85	"

### LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

Colour	inch	cm
Black	18.8	48
White	18.8	48
Blue	30.9	78.5
Red	46.4	118

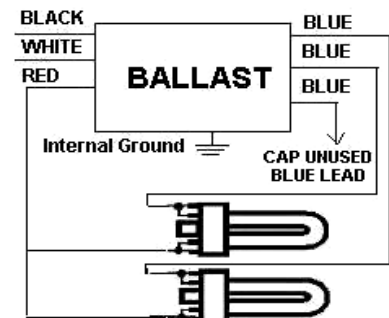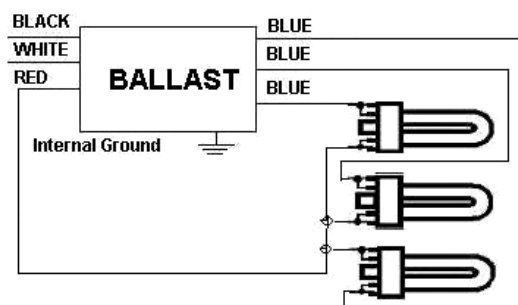

**WARNING: Always Disconnect Power Before Handling.**  
 Case Should be Grounded. Install in Accordance  
 with National and Local Electrical Codes.

Series MU, MS    L    W    H    ML  
 Case Size:    241mm 43.8mm 29.5mm 226mm  
                   9.5inch 1.72inch 1.16inch 8.9inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7  
 TEL: 604-904-9533 FAX: 604-904-9634  
 EMAIL: sagelighting@shaw.ca    www.sagelighting.com

*Sage  
 Lighting Ltd.*