

COMPACT 1 or 2x32W, 26W, 1x42W 2D 1x38W

Programmed Start

Programmed Start (Series) Universal Voltage 120V-277V High Frequency Electronic ballast for one or two (1 or 2) 32W, 26W or one (1) 42W Compact or 2D GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor, HL
 Sound Rating: Class A
 Min. Starting Temp: -30° C
 Max. Case Temp: 90° C
 End of Lamp Life Protection Circuit

Surge Protection:
 Thermal Protection:
 Lamp Current Crest Factor:
 Remote Mounting Distance:
 Power Factor:
 Input Frequency:
 THD:

Meets ANSI C62.41
 CLASS P
 < 1.6
 21 ft
 0.99
 50/60HZ
 < 10%

For Bottom leads Specify "B" at the end of Model #

Case Size: Series C1U



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

7/07/07

| NO. OF LAMPS | INPUT VOLTAGE | LAMP WATTS | INPUT WATTS AVERAGE | MAX INPUT CURRENT (A) | BALLAST FACTOR | MODEL |
|--------------|---------------|------------|---------------------|-----------------------|----------------|--------|
| 2/1 | 120V | 32/26 | 64/33 & 52/28 | 0.53/0.27 & 0.43/0.23 | >0.90 | NCU232 |
| 2/1 | 277V | 32/26 | 64/33 & 52/28 | 0.23/0.11 & 0.18/0.10 | >0.90 | " |
| 1 | 120V | 42/38 | 44/40 | 0.36/0.33 | >0.90 | NCU232 |
| 1 | 277V | 42/38 | 44/40 | 0.15/0.14 | >0.90 | " |

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

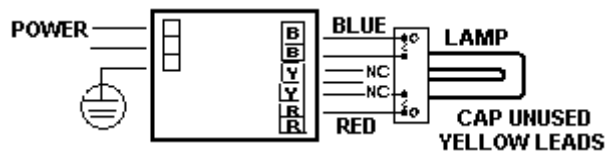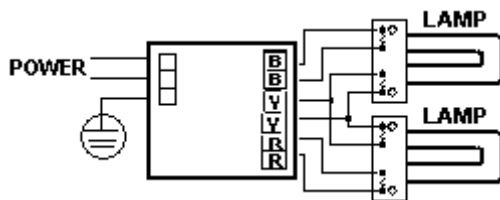

WARNING: Always Disconnect Power Before Handling.
 Case Should be Grounded. Install in Accordance
 with National and Local Electrical Codes.

Series C1U L W H ML
 Case Size: 132mm 62mm 30mm 122mm
 5.2inch 2.5inch 1.18inch 4.8inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*