

# LINEAR HO T5 2x54W 0-10V Dimming BIAX (TT5) 2x55W 0-10V Dimming

Programmed Start (Slim Low Profile, High Case Temperature) Preliminary Spec

Programmed Start (Series) Universal Voltage 120V-277V High Frequency Electronic Dimming ballast for two (2) Linear HO T5 54W or Bix (TT5) 55W GE, Philips, Osram Fluorescent lamps.

## Technical Specification:

UL Listed, CUL Certified, ROHS Compliant  
EMI FCC Parts 18, Subparts C, Class A  
Rating: Type 1 Outdoor, HL  
Sound Rating: Class A  
Min. Starting Temp : 10° C  
Max. Case Temp: 90° C  
End of Lamp Life Protection Circuit

Surge Protection:  
Thermal Protection:  
Lamp Current Crest Factor: < 1.7  
Remote Mounting Distance: 21 ft  
Power Factor: 0.99  
Input Frequency: 50/60HZ  
THD < 10%

Meets ANSI C62.41  
CLASS P


Case Size: Series E9

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS		INPUT CURRENT		BALLAST FACTOR	MODEL
			MIN	MAX	MIN	MAX (A)		
2	120V	54	24	120	0.20	1.02	0.03/1.00	NU254T5D-ROHS
2	230V	54	24	120	0.10	0.52	0.03/1.00	"
2	277V	54	24	120	0.09	0.43	0.03/1.00	"
2	120V	55	22	108	0.19	0.9	0.03/0.90	NU254T5D-ROHS
2	230V	55	22	108	0.10	0.47	0.03/0.90	"
2	277V	55	22	108	0.08	0.39	0.03/0.90	"

### LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

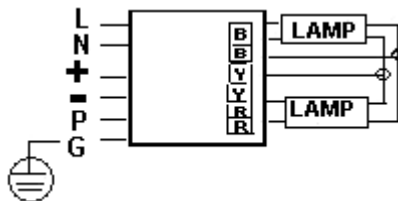

**WARNING: Always Disconnect Power Before Handling.**  
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Series E9 L W H ML  
Case Size: 395mm 38mm 29 mm 387mm  
15.5inch 1.5inch 1.14inch 15.2inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7  
TEL: 604-904-9533 FAX: 604-904-9634  
EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage  
Lighting Ltd.*