

LINEAR T5 1 or 2x35W, 28W

Programmed Start (Low Profile)

Programmed Start (Series) Universal Voltage 120V-277V or 347V, High Frequency Electronic ballast for Linear Standard T5 one or two (1 or 2) 35W, 28W GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, ROHS Compliant
 Factory ISO-9002 Certified
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor, HL
 Sound Rating: Class A
 Min. Starting Temp : - 30° C
 Max. Case Temp: 90° C
 End of Lamp Life Protection Circuit

Surge Protection: Meets ANSI C62.41
 Thermal Protection: CLASS P
 IR Interference: None
 Lamp Current Crest Factor: < 1.6
 Remote Mounting Distance: 21 ft
 Power Factor: 0.99
 Input Frequency: 50/60HZ



Case Size: Series E5, E3

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice 10/05/09

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	THD (%)	BALLAST FACTOR	MODEL
2 & 1	120V	35/28	80/40 & 68/35	0.66/0.33 & 0.56/0.29	<10	0.95/1.05	NU235T5-ROHS
2 & 1	277V	35/28	80/40 & 68/35	0.28/0.14 & 0.24/0.12	<10/15	0.95/1.05	"
2 & 1	347V	35/28	80/40 & 68/35	0.23/0.11 & 0.19/0.10	<10/15	0.95/1.05	NC235T5-ROHS

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

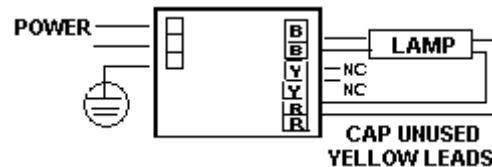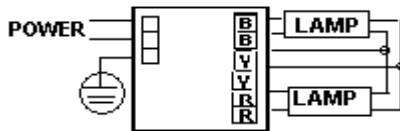

WARNING: Always Disconnect Power Before Handling.
 Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

	L	W	H	ML
Series E5 120-277V	290 mm 11.4inch	34mm 1.34inch	29mm 1.14inch	282 mm 11.1inch
Series E3 347V	325 mm 12.8inch	34mm 1.34inch	29mm 1.14inch	317mm 12.48inch

500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*