

LINEAR T8 1 or 2x32W, 30W, 28W, 25W, 17W 1x40W

Programmed Instant Start Parallel
Micro Case THD < 10%

Programmed Instant Start (parallel) Universal Voltage 120V-277V or 347V High Frequency Electronic ballast for T8 40W 32W, 30W, 28W, 25W, 17W GE, Philips, or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, ROHS Compliant
EMI FCC Parts 18, Subparts C, Class A
Rating: Type 1 Outdoor HL
Sound Rating: Class A
Min. Starting Temp: -18° C
Max. Case Temp: 75° C
THD: < 10% 277V, 347V 1-lamp 25W < 15%

Surge Protection: Meets ANSI C62.41
Thermal Protection: CLASS P
Lamp Current Crest Factor: < 1.7
Remote Mounting Distance: 21 ft
Power Factor: 0.99
Input Frequency: 50/60HZ

Case Size: Series MC

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice



NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2	120V	32/30/25/17	57/56/46/33	0.48/0.47/0.37/0.28	0.88/0.93/0.90/0.95	SU232T8MCIS-ROHS
1	120V	40/32/25/17	44/36/30/20	0.37/0.30/0.25/0.17	1.03/1.06/1.13/1.45	"
2	277V	32/30/25/17	57/56/46/33	0.20/0.20/0.16/0.12	0.88/0.93/0.90/0.95	"
1	277V	40/32/25/17	44/36/30/20	0.16/0.13/0.11/0.07	1.03/1.06/1.13/1.45	"
2	347V	32/30/25/17	57/56/46/34	0.16/0.16/0.07/0.09	0.88/0.95/0.95/1.03	SC232T8MCIS-ROHS
1	347V	40/32/25/17	43/36/30/20	0.12/0.10/0.08/0.06	1.00/1.08/1.13/1.45	"

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

Lead Length

Colour	inch	cm
Black	18.8	48
White	18.8	48
Blue	30.9	78.5
Red	46.4	118

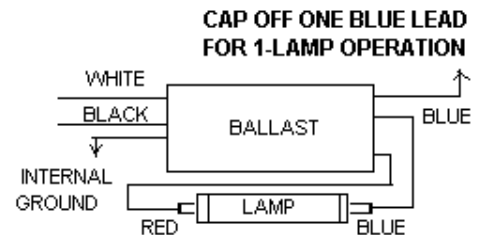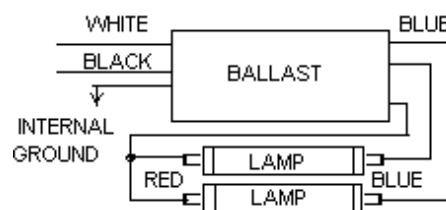

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Series MC
Case Size:

L	W	H	ML
241mm	32mm	28mm	226mm
9.5inch	1.26inch	1.1inch	8.9inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
TEL: 604-904-9533 FAX: 604-904-9634
EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*